



1900 Wellworth Ave. • Jackson, MI 49203
517-787-2100

Submittal Data

MODEL
PTAC12A130BSC

Project Name:	
Location:	
Engineer:	
Submitted to:	
Submitted by:	

Approval:	
Date:	
Construction:	
Unit #:	
Drawing #:	

Reference:

PERFORMANCE DATA

Power supply		208/230V/60
Cooling		
Capacity	Btu/h	11800/12000
Input	W	1100/1140
Rated current	A	5.4/5.1
EER	Btu/w	10.7/10.5

Heating		
Capacity	Btu/h	NA
Rated Input (elect. Heater)	Kw	3
Rated current	A	NA
Max. Current	A	NA

Compressor Electrical		
Model		44B282A
Type		ROTARY
Brand		RECHI
Capacitor	mF	25
Refrigerant type	oz	R410A/33.5

Air flow & Noise level		
Indoor air flow	CFM	470/410
Indoor noise level	dB(A)	48/42
Outdoor noise level	dB(A)	66

Indoor Fan Motor		
Model		YDK-30-4P2
Input	W	64
Capacitor	uF	1.5
Speed(Hi/Lo)	rpm	1050/850

Accessories	
Wall Sleeve-breakdown	7602-500F
Stamped Aluminum Grill	7602-501F
Architectural Aluminum Grill	7602-505F
Colored Polymer Grills	See Catalog
Indoor Discharge Air Deflector	7602-508F
Wireless Wall Thermostat	7602-536
Universal Remote	7602-512




Outdoor Coil	Seacoast Coating
---------------------	------------------

Outdoor Fan Motor		
Model		YDK-55-4P2
Input	W	95
Speed	RPM	1600

Dimensional Data		
Dimension(W*D*H)	inch	41.97x21.1x16.1
Packing (W*D*H)	inch	45.3*24.8*18.9
Net/Gross weight	lbs.	108/121

System Data	
Design pressure	PSIG
Thermostat type	Remote Controller On-Board Wired Thermostat

Cord and Plug		
Cord Length	ft.	6.5
Plug Face	Nema	6-20P

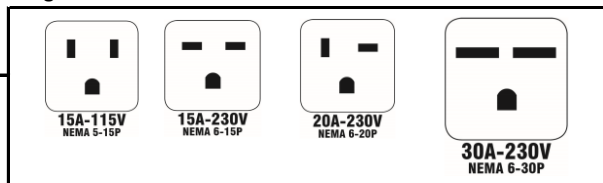

Subbase (no receptical)	7602-509F
Drain Kit	7602-506F
Duct Kit	7602-511F
Wired Thermostat	7800-200
Thermostat Locking Cover	7602-535